




# BEARING CORP.OF AMERICA

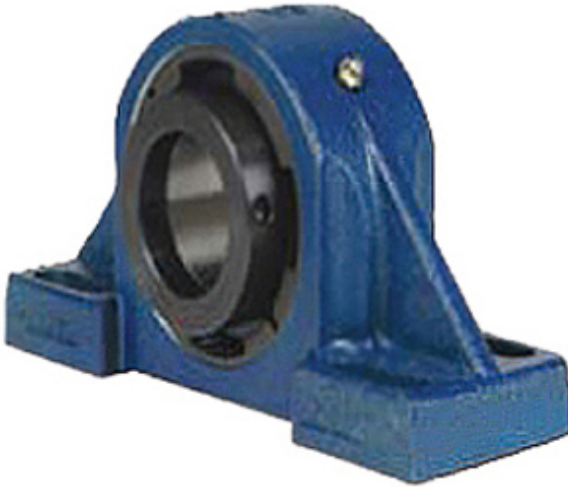

3.543 Inch | 90 Millimeter x 3.75 Inch | 95.25 Millimeter x 4.409 Inch | 112 Millimeter QM INDUSTRIES QVPG20V090SEN Pillow Block Bearings

Bearing No. QVPG20V090SEN

QVPG20V090SEN Bearing 2D drawings and 3D CAD models

|                           |  |
|---------------------------|--|
| Category                  | Pillow Block Bearings  |
| Inventory                 | 0.0  |
| Manufacturer Name         | TIMKEN   |
| Minimum Buy Quantity      | N/A  |
| Weight                    | 27.24  |
| Product Group             | M06288   |
| Number of Mounting Holes  | 4  |
| Mounting Method           | V Lock   |
| Housing Style             | 4 Bolt Pillow Block  |
| Rolling Element           | Spherical Roller Bearing   |
| Housing Material          | Cast Steel   |
| Expansion / Non-expansion | Expansion  |
| Mounting Bolts            | 3/4 Inch   |
| Relubricatable            | Yes  |
| Insert Part Number        | 22220  |
| Seals                     | Triple Lip Viton   |
| Housing Configuration     | 1 Piece Solid  |
| Inch - Metric             | Metric   |
| Other Features            | Double Row   Single Nut   SN Style   |
| Long Description          | 4 Bolt Pillow Block; 90MM Bore; 112MM Base to Center Height; V Lock Mount; Spherical Roller Bearing; 276.225MM Minimum Bolt Spacing; |



## BEARING CORP.OF AMERICA

|                                  |  |
|----------------------------------|--|
|                                  | 339.852MM Bolt Spacing<br>Maximum; Relubricatable;<br>Cast Steel; Triple |
| Category                         | Pillow Block   |
| UNSPSC                           | 31171511   |
| Harmonized Tariff Code           | 8483.20.40.80  |
| Noun                             | Bearing  |
| Keyword String                   | Pillow Block   |
| Manufacturer URL                 | <a href="http://www.qmbearings.com">http://www.qmbearings.com</a>        |
| Manufacturer Item Number         | QVPG20V090SEN  |
| Weight / LBS                     | 60   |
| d                                | 3.543 Inch   90 Millimeter   |
| Bolt Spacing Maximum             | 13.38 Inch  <br>339.852Millimeter  |
| Actual Bolt Center to<br>Center  | 0 Inch   0Millimeter   |
| D                                | 3.75 Inch   95.25 Millimeter   |
| B                                | 4.409 Inch   112 Millimeter  |
| Nominal Bolt Center to<br>Center | 12.1 Inch   308.5 Millimeter   |
| Bolt Spacing Minimum             | 10.875 Inch  <br>276.225Millimeter                                       |